

### Features

- Articulating spout with 360° rotation offers superior clearance for filling pots on cooktops and ranges
- Swing spout provides greater coverage area in sink for easier food prep and cleanup
- 3.2 gpm (12.1 lpm) flow rate at 60 psi (4.14 bar)
- Single lever handle with main lever shutoff
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Wall-mount



### Codes/Standards


ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
NOM Standards  
NOM 012-CONAGUA


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	VS	Vibrant® Stainless
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

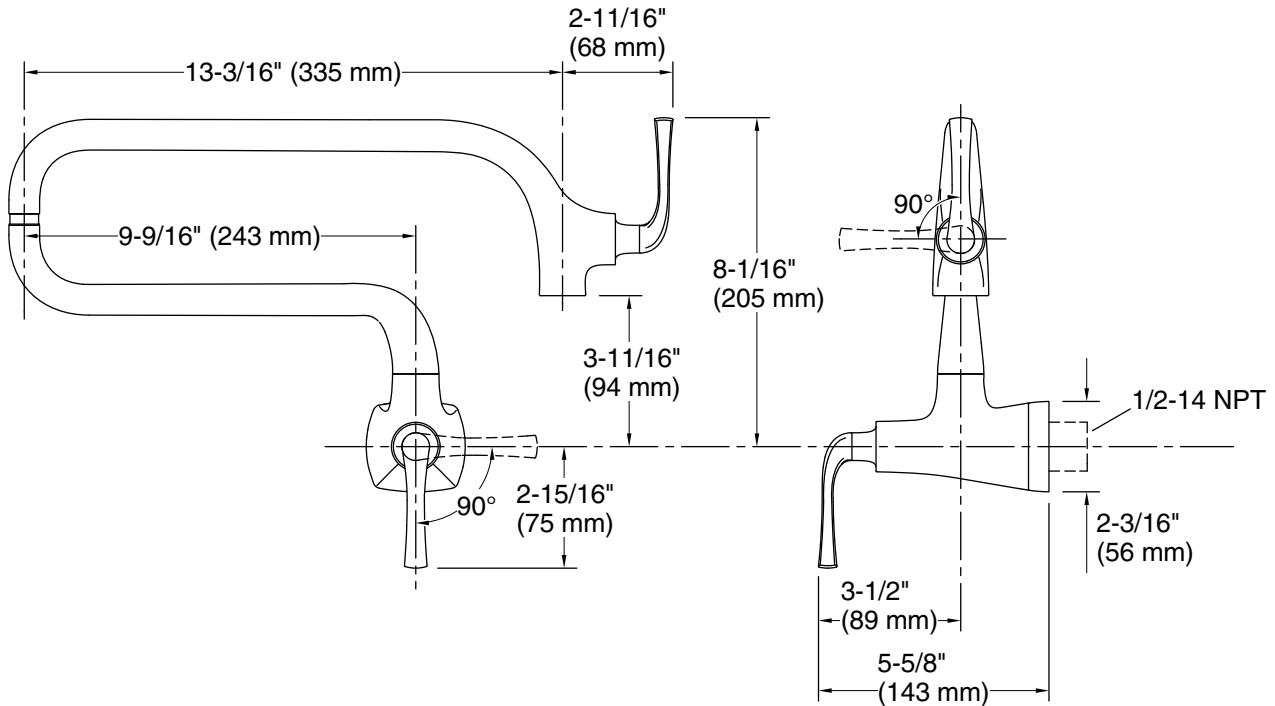

### Technical Information

All product dimensions are nominal.

Faucet flow rate: 3.2 gal/min (12.1 l/min)

### Spout:

Spout reach: 3-9/16" (91 mm)

### Notes

Install this product according to the installation instructions.